

35-LB CAPACITY OPL DRYER

AD-35i



Our i-Series Dryer Lineup offers versatility and customized solutions to help reinforce facility throughput in on-premise markets.

From the standard Stainless steel basket and front panel (which help protect against corrosion) to the multi-lingual, customizable and intelligent controls: We've designed an on-premise drying machine, engineered to help save money on utilities, payroll, and maintenance—all thanks to our innovative design.

With consistent performance, optimized dry times, and reliable operations, it's easy to see why ADC™ is a popular choice.

INTELLIGENT INVERTER DRIVE

Alternates the speed of the drum throughout the cycle: Allowing for a soft controlled start and optimized tumbling during drying. The inverter drive also features a simple and reliable single drive belt system making for easy serviceability.

FULLY-INSULATED CABINET

The preheat function helps to recover heat that is typically lost into the room by diverting it into the burner to warm the incoming air. This helps to improve dry times and overall throughput.

STAINLESS STEEL BASKET & FRONT

The i-Series comes standard with a stainless-steel basket and front panel helping to protect against corrosion.

The AD Series offers an optional stainless-steel basket and front panel helping to protect against corrosion.



STANDARD FEATURES

- Variable drum speed
- Pre-heat system
- Trans-axial airflow
- Fully-insulated cabinet
- Double-pane door glass
- Self-cleaning lint screen
- Direct spark ignition
- Two-point roller support
- "IMC®" intuitive micro control with auto-dry system
- S.A.F.E. (Sensor Activated Fire Extinguishing System)
- Single-phase reversing basket
- Stainless steel basket and fronts
- Simplified inverter drive system
- Fits through standard 36" door
- Available in gas & electric

OPTIONAL FEATURES

- Automatic Airflow Compensator (AAFC)*

*Optional AAFC adjusts exhaust fan speed to improve exhaust flow with increased back pressure caused by installation issues. This exclusive patented technology adjusts fan speed and enhances dryer performance. Measurements are calculated in real-time, on an ongoing basis to optimize dry-times and efficiency.

See adclaundry.com for warranty details.


VISIT ADCLAUNDRY.COM FOR MORE INFORMATION.

35-LB CAPACITY OPL DRYER


AD-35i




TOP VIEW

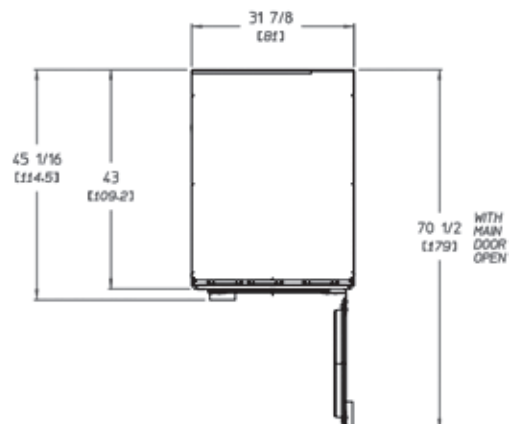

REAR VIEW

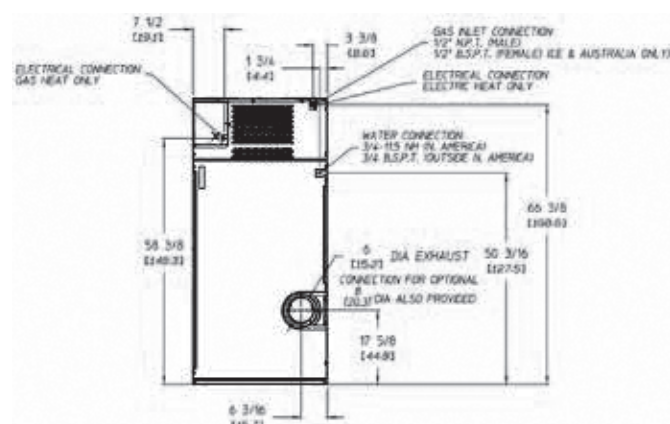

FRONT VIEW

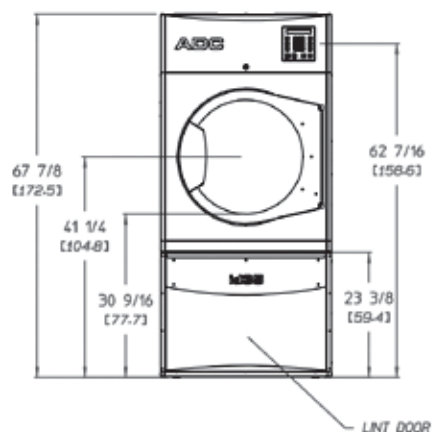

AD-35i OPL	ELECTRIC	GAS
CAPACITY		
Maximum Capacity Dry Weight — lbs (kg)	35 (15.87)	35 (15.87)
Tumbler Diameter — in. (cm)	30 (76.2)	30 (76.2)
Tumbler Depth — in. (mm)	29-3/8 (74.61)	29-3/8 (74.61)
Tumbler Volume — cu. ft. (L)	12.0 (339.80)	12.0 (339.80)
Tumbler/Drive Motor — hp (kW)	1 (0.75)	1 (0.75)
Blower/Fan Motor — hp (kW)	1/2 (.37)	1/2 (.37)
DIMENSIONS		
Cabinet Width — in. (cm)	31-7/8 (80.96)	31-7/8 (80.96)
Cabinet Depth — in. (cm)	43 (109.22)	43 (109.22)
Cabinet Height — in. (cm)	67-7/8 (172.40)	67-7/8 (172.40)
Door Opening (diameter) — in. (cm)	21-1/2 (54.61)	21-1/2 (54.61)
Door Sill Height — in. (cm)	30-9/16 (77.62)	30-9/16 (77.62)
Water Connection	3/4" - 11.5 NH (North America) 3/4" B.S.P.T. (Outside North America)	
Dryers per 20'/40' Container	10 / 22	
Dryers per 48'/53' Container	32 / 36	
APPROXIMATE WEIGHT		
Approximate Net Weight — lb (kg)	557 (252.65)	552 (250.38)
Approximate Shipping Weight — lb (kg)	590 (267.62)	585 (322.05)
Voltage Available	120-480V 1,3ø 2,3,4w 50 / 60 Hz	120-480V 1,3ø 2,3w 50 / 60 Hz
Airflow 50 HZ — CFM (CMM)	280 (7.93)	340 (9.63)
Airflow 60 HZ — CFM (CMM)	420 (11.89)	440 (12.46)
Heat Input — BTU/hr (kcal/hr)	N/A	70,000 (17,639)
Gas Inlet Connction Size — in.	N/A	1/2" N.P.T. (male) 1/2" B.S.P.T. (female) (CE and Australia)
Exhaust Connection (diameter) — in. (cm)	6 / 8 (15.24 / 20.32)	6 / 8 (15.24 / 20.32)
Oven Size	13.5 kW / 46,074 BTU / 11,611 Kcal	N/A
	12.4 kW / 42,310 BTU / 10,662 Kcal	N/A
	11.3 kW / 38,557 BTU / 9,716 Kcal	N/A
	10.1 kW / 34,462 BTU / 8,684 Kcal	N/A
	9 kW / 30,709 BTU / 7,739 Kcal	N/A
	8.3 kW / 28,320 BTU / 7,137 Kcal	N/A
	7.5 kW / 25,519 BTU / 6,449 Kcal	N/A
	6.7 kW / 22,861 BTU / 5,761 Kcal	N/A